

THP-SD

ThermoHose®




APPLICATIONS

- Dust Control
- Fume Removal
- General Purpose Ducting
- General Purpose Ventilation
- Industrial Vac Systems
- Industrial Venting-Air Circulation, Fabric Removal, Grider/Sanders
- Light Material Handling

FEATURES

- Superior flexibility at low temperatures
- Not subject to common bond failure
- Negative and Positive Applications

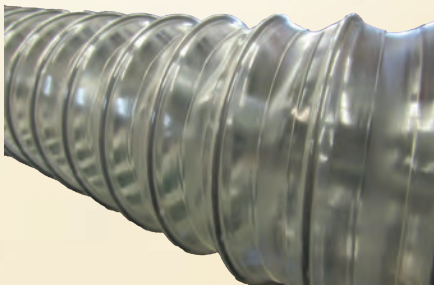

ABC INDUSTRIES, INC.

P.O. Box 77, Warsaw, IN 46581-0077
800.426.0921 Toll-Free
574.267.5166 Phone
574.267.2045 Fax
sales@abc-industries.net
www.abc-industries.net



THERMOHOSE®

*Thermoplastic Urethane
with Steel Wire Helix, Heat-Sealed Construction*

SPECIFICATIONS

Thickness	25 mil	
Temperature	-20° to 180° F (-29° to 82° C)	
Standard Pitch	Pitch	Diameter
	.625" (1.59 cm)	2"-3" (50-76 mm)
	1.25" (3 cm)	4"-8" (102-203 mm)
	1.375" (3.5 cm)	10"-24" (254-610 mm)
Wire	Hard-drawn Steel	
Inside Diameter	2" - 24" (51 - 610 mm)	
Length	25' (7.5 m) Custom lengths available upon request.	
Color	Clear	