



Athletic Fabrics

Discover the Duravider with RipStop Reinforcement Advantage!

- RipStop fabric reduces life cycle costs by allowing for repair, rather than replacement, of damaged curtains.
- The sequentially staggered yarn prevents small snags from becoming major tears. The affected area can be easily repaired with a simple, inexpensive patch kit.
- Rugged curtain construction with high-strength polyester yarns adds exceptional durability without increasing overall fabric weight

RipStop - Duravider Fabric (Ideal for Gym Curtains)

SPECIFICATIONS	14 OZ.	18 OZ.
Roll Width	61" (155 cm) standard. Larger widths available. Contact for details.	61" (155 cm) standard. Larger widths available. Contact for details.
Temperature Range	-20 to 180° F (-29 to 82°C)	-20 to 180° F (-29 to 82°C)
Scrim Count	9 x 9 RS	9 x 9 RS
Tear, Trap - Av. (lbs.) (ASTM D751)	W = 75, F = 65	W = 80, F = 65
Tensile, Grab - Av. (lbs.) (ASTM D751)	W = 270, F = 240	W = 290, F = 250
Adhesion - Av. (lbs.) (ASTMD751)	W = 30, F = 30	W = 35, F = 45
Standard Colors <i>Custom colors available. Minimum purchase required.</i>	Gray, Black, Yellow, White, Blue, Green, Red	Black, Yellow, White




9x9 Ripstop Scrim
(Duravider with Ripstop 14 & 18 oz.)

All Duravider Fabrics Feature:

- Reinforced Duravider fabrics meet NFPA 701 Method 2 and ASTM G-21 certification standards
- Tear & abrasion resistant
- UV Stabilized (solid colors)
- Formulated with mold and mildew inhibitors
- Weldable composition
- NAFTA compliant

Conventional Duravider Fabric

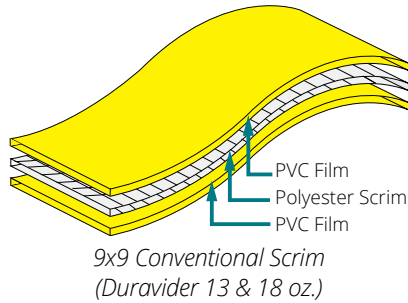

Conventional - Duravider Fabric (Ideal for Mats, Pads, and Covers)

California Fire Marshal certification is only applicable to 13 & 18 oz. Duravider conventional scrim fabric.



SPECIFICATIONS	13 oz.	18 oz.
Roll Width	61" (155 cm) standard. Larger widths available. Contact for details.	61" (155 cm) standard. Larger widths available. Contact for details.
Temperature Range	-20 to 180° F (-29 to 82°C)	-20 to 180° F (-29 to 82°C)
Scrim Count	9 x 9	9 x 9
Tear, Trap (lbs.) (ASTM D751)	W = 30, F = 45	W = 55, F = 40
Tensile, Grab (lbs.) (ASTMD751)	W = 215, F = 230	W = 265, F = 240
Adhesion (lbs.) (ASTM D751)	W = 30, F = 30	W = 45, F = 50
STANDARD COLORS: Gray, Black, Yellow, White, Blue, Green, Red Custom colors available. Minimum purchase required.		

Double-Polished Clear Fabric

Double-polished clear 14 oz. fabric adheres to UL94VTM-O and FMVSS302.

SPECIFICATIONS	14 mil	20 mil
Roll Width	54" (137 cm)	54" (137 cm)
Cold Crack (ASTMD 2136)	-31° F (-35°C)	Call for Details
Color	Clear	Clear
Finish	Double-Polished	Double-Polished
Tear Strength (lb.) (ASTM D751)	W = 32, F = 30	Call for Details
Tensile Strength (lb.) (ASTM D751)	W = 97, F = 91	Call for Details
OPTIONAL SCRIMS: 2 x 2, 9 x 6 Minimum purchase required.		



ABC INDUSTRIES, INC.

P.O. Box 77
Warsaw, IN 46581-0077 U.S.A.
800.426.0921 Toll-Free
574.267.5166 Phone
574.267.2045 Fax
sales@abc-industries.net
www.abc-industries.net