


Belt-Driven HVLP Ring Fan with Skid Mounting Base



Standard Features Include:

- Heavy gauge, mild steel all welded, with angle ring and 12 gauge orifice construction
- Cast aluminum, airfoil, adjustable pitch propeller with taper lock bushing hub
- Statically and dynamically balanced
- V-belt drive with belts and sheaves
- OSHA belt and shaft guards
- Pillow block bearings – L-10 life of 100,000 hours
- Split fan ring for shipment, if required
- Split safety front and rear guards
- Standard duty TEFC 480/3/60, 1.15 SF motor mounted on an adjustable base located just above the skid base for the lowest C/G possible
- Heavy C-channel skid base with tow hooks
- Fans are assembled and tested per AMCA standards prior to shipment

Dimensional Data

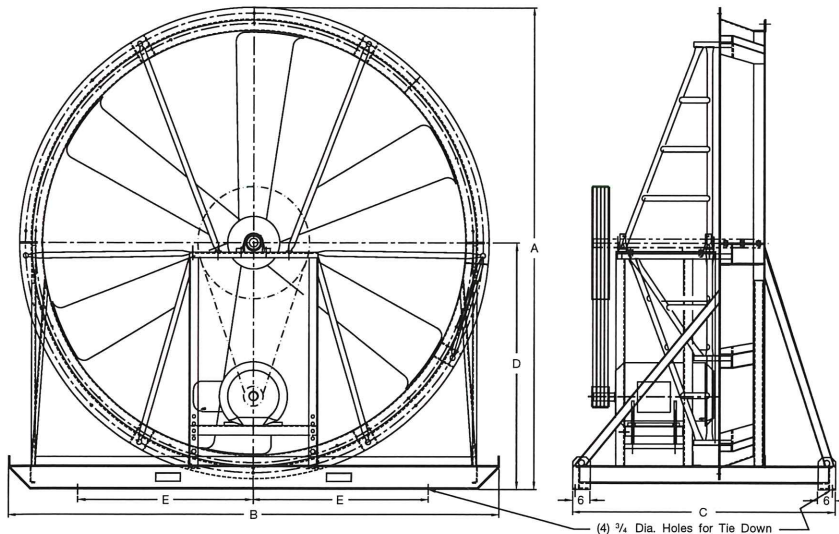

| SIZE | A | B | C | D | E |
|------|--------|-----|----|-------|----|
| 96 | 109.50 | 120 | 80 | 56.50 | 48 |
| 108 | 126.25 | 132 | 86 | 61.88 | 54 |
| 120 | 139.50 | 144 | 86 | 71.50 | 54 |
| 132 | 151.50 | 156 | 90 | 77.00 | 60 |
| 144 | 164.50 | 168 | 90 | 84.00 | 60 |

| SIZE | HP | SCFM | SP |
|------|-----|---------|-------|
| 96 | 40 | 150,000 | 0.50" |
| 108 | 60 | 200,000 | |
| 120 | 75 | 250,000 | |
| 132 | 100 | 300,000 | |
| 144 | 100 | 350,000 | |



ABC INDUSTRIES, INC.
P.O. Box 77, Warsaw, IN 46581-0077
800.426.0921 Toll-Free
574.267.5166 Phone
574.267.2045 Fax
sales@abc-industries.net
www.abc-industries.net